

Electric striker, 22 mm width for flush doors 48 mm thick



Description

Adjustable electrical striker for 48 mm thick flush doors (lock on axis with the panel).

NB. The repeater is internal and the good functioning is guaranteed apart from the the gap adjustment of the door.

Application

To be coupled with Panic Exit lock Opera SL for REI wooden doors.


Mounting

Execute on the frame a proper milling and

fix with 4x25 mm screws.

NB. Different assembly of the electric device implies different cutout (refer to drawing).

Warning! This striker is not vertically aligned with the lock forend: is positioned 25 mm higher than the lock.

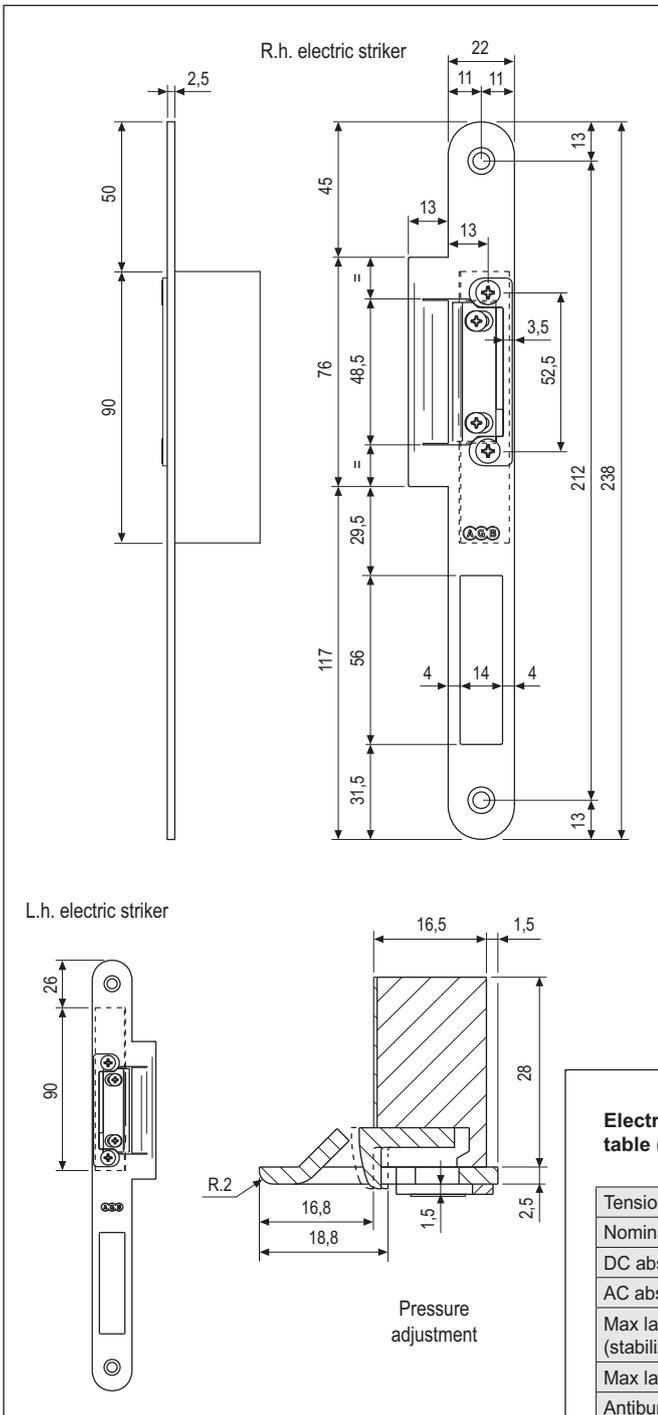

STEEL - With repeater

Article	Type	Description
B02605.03.XX	r.h.	without release lever
B02606.03.XX	l.h.	without release lever
B02605.04.XX	r.h.	with release lever
B02606.04.XX	l.h.	with release lever

STEEL - Without repeater

Article	Type	Description
B02605.01.XX	r.h.	without release lever
B02606.01.XX	l.h.	without release lever
B02605.02.XX	r.h.	with release lever
B02606.02.XX	l.h.	with release lever
B02605.05.XX	r.h.	without release lever
B02606.05.XX	l.h.	without release lever
B02605.06.XX	r.h.	without release lever + diode
B02606.06.XX	l.h.	without release lever + diode
B02605.08.XX	r.h.	without release lever
B02606.08.XX	l.h.	without release lever

NB. "R.h." and "l.h." refers to pull doors according to DIN 107 regulation. Refer to price list in force in order to verify the availability of the finishes.

Repeater: it is an internal device wich stores the pulse and keeps the movable part of the device unblocked until the door is opened and then closed again. In all AGB electric strikes this device is internal and not bounded to the latch. When using badge readers or similar temporised for more than 3 seconds, we recommend to use electric strikes without repeater.

Without repeater: the electric strikers allows the opening of the door only while receiving the pulse. When the pulse stops, the strikes blocks itself even if the door was not opened.

Manual release lever: it allows too keep the door constantly unblocked.

Diode: the electric devices with diode work on DC current only. It is a device which prevents the electric system from the overvoltage.

Electronic device data table (collected at 20° C)

	Low absorption			Normal absorption
	B0260X.05	B0260X.06	B0260X.08	B0260X.01/02/03/04
Tension	12V ±1V	12V ±1V	24V	12V
Nominal resistance	58 Ω	58 Ω	235 Ω	8 Ω
DC absorption (stabilized)	200 mA	200 mA	105 mA	1560 mA
AC absorption	130 mA	-	70 mA	1100 mA
Max latch preloading - DC (stabilized)	10N	10N	10N	50N
Max latch preloading - AC	50N	-	50N	160N
Antiburglar resistance	3000N	3000N	3000N	3000N