

Long wing electric striker, 25 mm width for rebated doors



Description

Adjustable electric striker, with long covering wing, for rebated door. Available with or without repeater and with or without release lever.

NB. The repeater is internal and the good functioning is independent from the adjustment of the door gap.


Application

With panic exit locks Opera SL for wooden REI doors.

Mounting

Execute a proper milling on the frame and fix with 4x25 mm screws.

Warning! This striker is not vertically aligned with the lock forend: is positioned 28 mm higher than the lock. With Opera SL locks, forend 18, the striker loses the whole pressure adjustment.

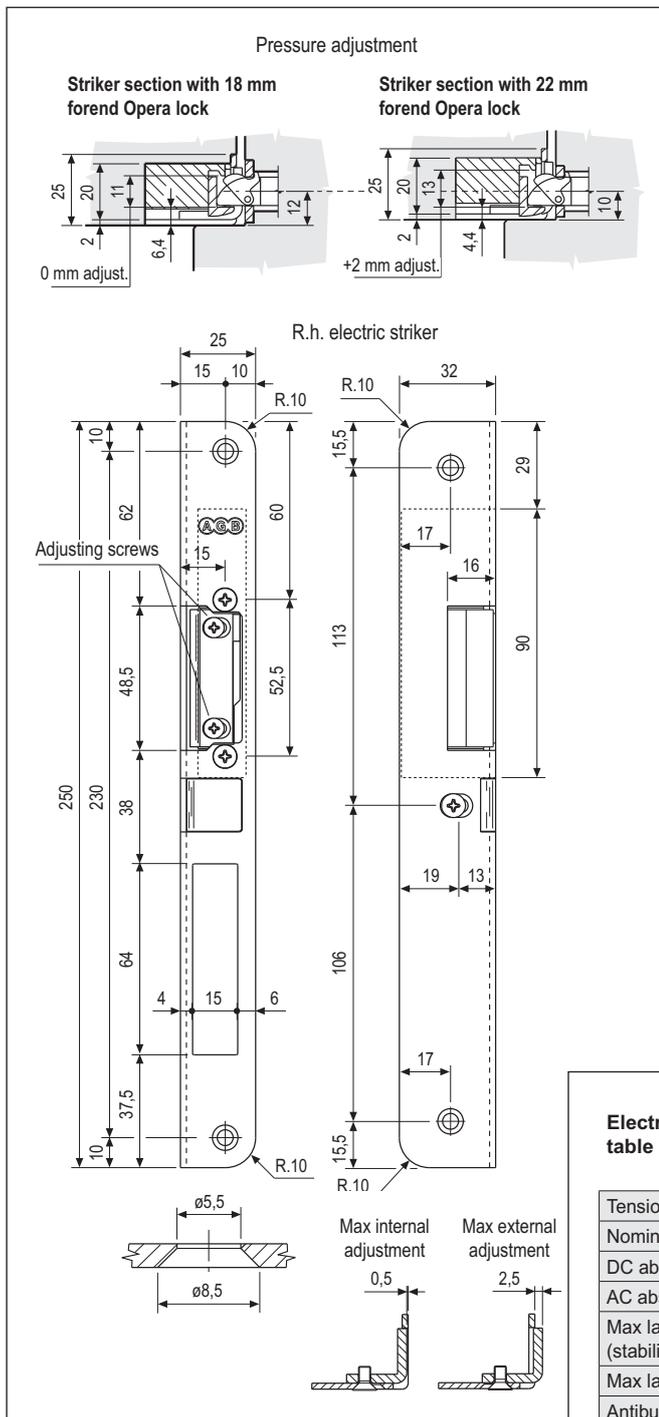

STEEL - With repeater

| Article | Type | Description |
|--------------|------|-----------------------|
| B02603.03.XX | r.h. | without release lever |
| B02604.03.XX | l.h. | without release lever |
| B02603.04.XX | r.h. | with release lever |
| B02604.04.XX | l.h. | with release lever |
| B02603.07.XX | r.h. | without release lever |
| B02604.07.XX | l.h. | without release lever |

STEEL - Without repeater

| Article | Type | Description |
|--------------|------|-------------------------------|
| B02603.01.XX | r.h. | without release lever |
| B02604.01.XX | l.h. | without release lever |
| B02603.02.XX | r.h. | with release lever |
| B02604.02.XX | l.h. | with release lever |
| B02603.05.XX | r.h. | without release lever |
| B02604.05.XX | l.h. | without release lever |
| B02603.06.XX | r.h. | without release lever + diode |
| B02604.06.XX | l.h. | without release lever + diode |
| B02603.08.XX | r.h. | without release lever |
| B02604.08.XX | l.h. | without release lever |
| B02603.10.XX | r.h. | without release lever |
| B02604.10.XX | l.h. | without release lever |

NB. "R.h." and "l.h." refers to pull doors according to DIN 107 regulation. Refer to price list in force in order to verify the availability of the finishes.

Repeater: it is an internal device which stores the pulse and keeps the movable part of the device unblocked until the door is opened and then closed again. In all AGB electric strikes this device is internal and not bounded to the latch. When using badge readers or similar temporised for more than 3 seconds, we recommend to use electric strikes without repeater.

Without repeater: the electric strikers allows the opening of the door only while receiving the pulse. When the pulse stops, the strikes blocks itself even if the door was not opened.

Manual release lever: it allows too keep the door constantly unblocked.

Diode: the electric devices with diode work on DC current only. It is a device which prevents the electric system from the overvoltage.

Electronic device data table (collected at 20° C)

| | Low absorption | | | Normal absorption | |
|--|------------------------|-----------|-----------|--|-----------|
| | B0260X.05 B0260X.07 | B0260X.06 | B0260X.08 | B0260X.01 B0260X.02 B0260X.03 B0260X.04 | B0260X.10 |
| Tension | 12V+/-1V | 12V ±1V | 24V | 12V | 12V |
| Nominal resistance | 60 Ω | 58 Ω | 235 Ω | 7,7 Ω | 17 Ω |
| DC absorption (stabilized) | 200 mA | 200 mA | 105 mA | 1560 mA | 650 mA |
| AC absorption | 130 mA | - | 70 mA | 1100 mA | 440 mA |
| Max latch preloading - DC (stabilized) | 10N | 10N | 10N | 30N | 18N |
| Max latch preloading - AC | 80N | - | 80N | 120N | 100N |
| Antiburglar resistance | 3000N | 3000N | 3000N | 3000N | 3000N |